



LHB-serija

Industrijska LED rasveta



DIM
1-10V
DIMOVANJE



IP65
ZAŠTITA OD
VLAGE I
PRSKANJA



IK09
ZAŠTITA OD
UDARA



100,000h
ŽIVOTNI
VEK



5god
GARANCIJA



**Forest
electronic**



LHB-serija

Zahvaljujući tehnologiji livenja pod pritiskom, postiže se estetski izgled. Profesionalna fotometrija maksimalno raspoređuje svetlost svetiljke.





Snaga:
100W/120W

Težina svetiljke:
3,0kg +/-0,2





Snaga:
200W/240W

Težina svetiljke:
5,8kg +/-0,2





Snaga:
300W

Težina svetiljke:
8,7kg +/-0,2



Snaga:
400W/480W

Težina svetiljke:
11,5kg +/-0,2




**Drajver instaliran
na zadnji poklopac
radi boljeg pasivnog
hlađenja.**



**Dizajn koji ubrzava
protok vazduha.**

**Rebra za hlađenje na
unutrašnjem kućištu
poboljšavaju
performanse
odvođenja toplote.**

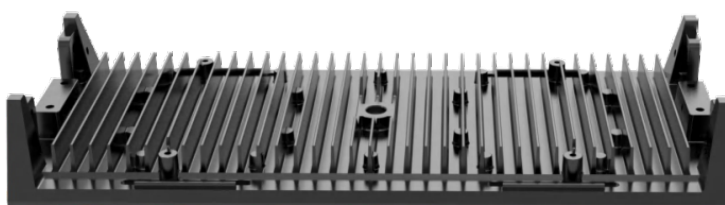



Mikrotalasni senzor



Infracrveni senzor

Može biti opremljena senzorima po zahtevu

Veća ušteda električne energije pametnim senzorom pokreta, mikrotalasni ili infracrveni.

Integrirani senzor pokreta se može programirati da poveća prilagođeni opseg detekcije uštede energije praga dnevne svetlosti, vreme rada svetiljke i podešavanja dimovanja.



Daljinski upravljana LED rasveta

Zakoračite u pametno osvetljenje sa našim pametnom industrijskom rasvetom. Mikrotalasni ili infracrveni senzor, je Vaš izbor.

Podesite osvetljenje, boju i vreme rada svetiljke preko daljinskog upravljača.

Osvetljenje pomoću senzorskog upravljanja.

Jednostavno upravljanje grupama svetiljki.

Tehničke karakteristike:

Proširiva i poveziva po potrebi da zadovolji visoke zahteve osvetljenja


Do 480W




100/120W




200/240W




300W




400/480W

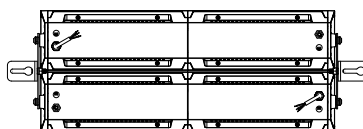

Montaža:



Montaža na nosač

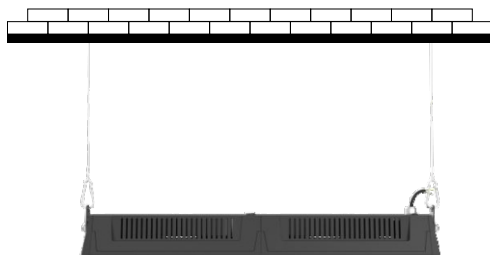


Montaža na sajlu – spušteno


Tehničke karakteristike:

Serijska	LHB-serijska						
Snaga	100W	120W	200W	240W	300W	400W	480W
Efikasnost	180 lm/W, 160 lm/W						
Jačina svetla	16000 - 18000 lm	19200 - 21600 lm	32000 - 36000 lm	38400 - 43200 lm	48000 - 54000 lm	64000 - 72000 lm	76800 - 86400 lm
Ulazni napon	100-277VAC, 50 / 60 Hz						
Power faktor	0,9						
Prenaponska zaštita	6 kV faza-faza / 6kV faza-zemlja						
Kontrola	1-10V, DALI, DALI 2, senzor pokreta (opcija)						
IP zaštita	IP65						
IK zaštita	IK09						
CCT	6500K, 5700K, 5000K, 4000K, 3000K						
CRI	80, 70						
Radna temperatura	-30°C to + 45°C						
Ugao svetla	60°, 90°, 120°						
Montaža	Montaža na sajlu, montaža pomoću nosača						
Garancija	5 godina						


Fotometrija:

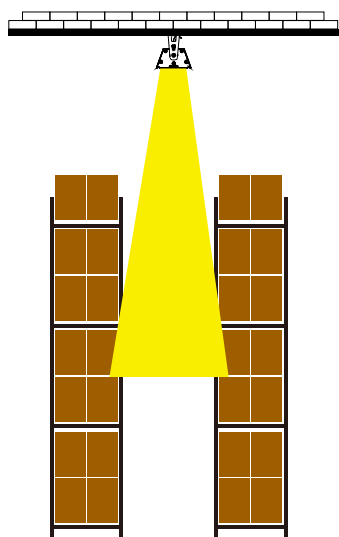

30x70°

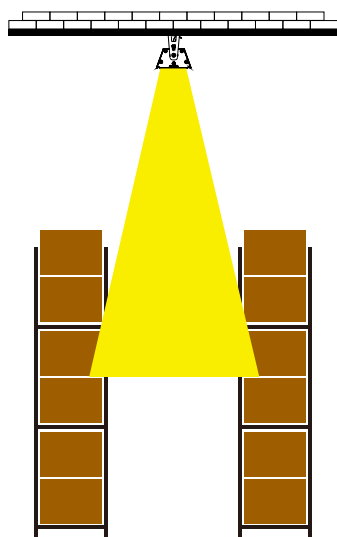

40x110°

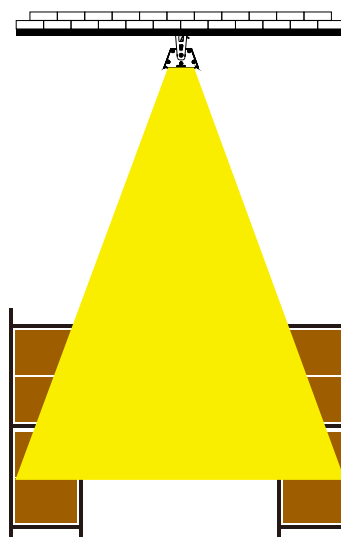

60x90°